


Evolution
for your Demand

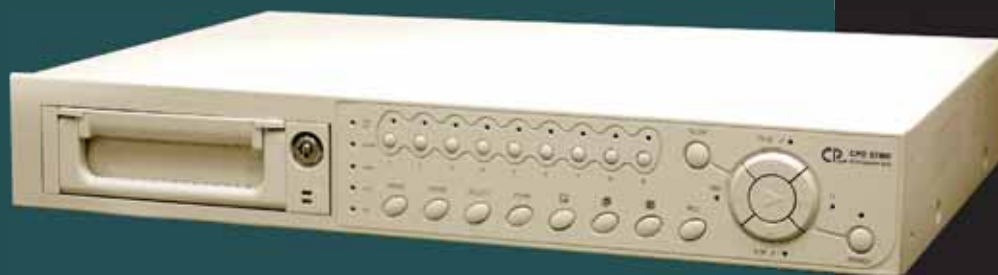

CPD576W

9 Channel Network DVS

COST & PERFORMANCE

» Features

- **Support remote control and live view via the internet**
- Wavelet Compression Format replaces Time Lapse VCR + 9 CH multiplexer
- Stand-alone design
- 4 Level video quality adjustable: Best / High / Normal / Basic
- Support 9 channels Multiplexing function
- Independent title setting (up to 6 characters) for each channel.
- **Motion trigger recording function**, which uses 15X12(NTSC) or 15X14(PAL) motion detection grids for each video channel
- 9 alarm inputs and one alarm output
- Video loss detected on each channel can record up to 160 events
- Power-loss memory function
- **Support 1 removable HDD (over 250 GB), IDE type**
- Quick Multiple Search by date / time / alarm list
- RS-232 and RS-485 communication protocol



Evolution for your Demand

Tel: 886-2-2655-3866
www.cpcamcctv.com

Fax: 886-2-2655-3855
marketing@cpcamcctv.com



CPD576W

9CH Network DVS

Specifications

MODEL	CPD576W
Video format	NTSC/EIA or PAL/CCIR
Network Interface	Ethernet(10/100 Base-T)
Protocols	TCP/IP, ICMP, SMTP, HTTP, FTP
Trigger & Action	E-Mail images or images uploading to FTP site's specific account/Remote Recording
Hard disk storage	IDE type, UDMA 66, 1 REMOVABLE HDDs supported over 250GB HDD
Record mode	Manual / Alarm / Timer / Motion
Camera Input Signal	Composite video signal 1 Vp-p 75 BNC, 9 channels
Camera Loop Back	Composite video signal 1 Vp-p 75 BNC, 9 channels
Main Monitor Output	Composite video signal 1 Vp-p 75 BNC
Call Monitor Output	Composite video signal 1 Vp-p 75 BNC
Ethernet	10 Mbps. Support Remote Control and Live view via Ethernet
Audio input	4 audio inputs, (RCA) *
Audio output	2 audio outputs, (RCA) **
Motion Detect Area	15 * 12 targets per camera (NTSC) / 15 * 14 targets per camera (PAL)
Motion Detect Sensitivity	256 Levels
Video Loss Detection	Yes
Refresh Rate	72 images/sec. for NTSC / 60 images/sec. for PAL
Recording Rate	25 images/sec. for NTSC / 18 images/sec. for PAL
Dwell Time	Programmable (1~10 Sec)
Picture in Picture	Yes (Movable)
Key Lock	Yes
Picture Zoom	2*2 (Movable)
Camera Title	6 letters
Video Adjustable	Color/ Contrast/ Brightness Adjustable
Alarm Input	TTL input, Hi (5V), Low (GND)
Alarm Output	COM,/N.O
Time Display Format	YY/MM/DD, DD/MM/YY, MM/DD/YY, OFF
Power Source	AC100~240V + 10% switching adaptor
Power Consumption	<27W
Operation Temperature	10 ~ 40 °
Dimension (mm)	380(W) x 270(D) x 65(H)
Gross Weight	6.5kgs



Evolution for your Demand

Tel:886-2-2655-3866
www.cpcamcctv.com

Fax:886-2-2655-3855
marketing@cpcamcctv.com